

KOALA GREEN 140 AF



ATP



Self-powered refrigerated container with removable battery

- Available in versions:
 - AF: with temperature adjustment range between -30°C e +10°C;**
 - AFH: with heating kit and temperature adjustment range between -30°C e +40°C.**
- Available with 65Ah or 100Ah battery LiFePO4.
- The battery can be recharged connecting Koala Green to the usual 230Vac main power for about 8/10 hours. In alternative, a practical counter allows to remove the battery from the cooling unit and recharge it with a dedicated external power supply.
- The battery LiFePO4 stores the energy necessary for the power supply of cooling unit. Once recharged, the battery gives the container autonomy. The autonomy duration depends on the battery amperage, the features of the refrigerated container, the size of the load, the temperature setting and the ambient temperature.
- The insulation provided by the container walls guarantees the temperature maintenance with a minimum number of ignitions of the cooling unit and this helps to limit the energy consumption.
- In the positive versions the static cooling unit ensures a reduced electricity consumption. In the negative versions, the ventilated cooling unit ensures a faster and more uniform temperature achievement inside the container.
- The cooling unit comes into operation when the internal temperature is higher than the temperature set by programmable digital thermostat. This allows the temperature to be maintained at a constant level, even at very cold external temperatures.
- In AFH versions the cooling unit starts working when the internal temperature is lower than the temperature set by the programmable digital thermostat. This allows to keep the temperature constant even in very cold external temperatures.
- Total maintenance of the required temperature at all stages of transport.
- Equipped with a low-consumption cooling unit.
- It can be powered at 230Vac using normal main power.
- Manufactured using the rotational moulding technology: mono-block container and door (free of sharp edges, joints and welds).
- Fully recyclable** at the end of its operation life.




MANUFACTURING MATERIALS

Polietilene	inner and outside walls of the container and the door; suitable for food contact.	Polyurethane	insulating material between the walls of the container and of the door, free of CFC and HCFC
Silicon rubber	gasket	Polyamide and rubber	latches
Stainless Steel	handles	Stainless steel	Casing and hinges

TECHNICAL FEATURES

<p>AF model</p>	<ul style="list-style-type: none"> • 0°C +10°C • -18°C +10°C • -25°C +10°C • -30°C +10°C 	<p>AFH model</p>	<ul style="list-style-type: none"> • 0°C +40°C • -18°C +40°C • -25°C +40°C • -30°C +40°C
<p>+/- 0,5 °C</p>	<p>Degree of accuracy in temperature control: +/-0,5 °C</p>		<p>Performance of the cooling unit for use at ambient temperature: +10°C +30°C Container (insulated case) guaranteed for use: -30°C +100°C</p>
	<p>Equipped with cable for power supply to 230Vac 50-60Hz of the cooling unit and for recharging the battery.</p>	<p>GAS</p>	<ul style="list-style-type: none"> • R134a (version 0°C +10/+40°C) • R452A (version -18°C +10/+40°C -25°C +10/+40°C -30°C +10/+40°C)
	<p>Insulated with CFC and HCFCfree polyurethane foam</p>		<p>Adjustment and control of the temperature with programmable digital thermostat.</p>
	<p>Battery indicator displays:</p> <ul style="list-style-type: none"> • Battery voltage (V) • Input/output current (A) • Input/output power (W) • Amperhours (Ah) consumed • Charging status (%) • Remaining autonomy (h) 		<p>Removable battery for easy replacement and recharging with external power supply.</p>
	<p>Static versions equipped with astatic evaporator "roll-bond"</p>		<p>Stainless steel integrated carry handles.</p>
	<p>Shockproof closures</p>		<p>Easily removable door seal</p>
	<p>Door openable up to 240°, with hinge integrated in the container</p>		<p>5 seats to house grids located at 62/152/242/332/422 mm from the base of the container. Grids available on request.</p>
	<p>Mono-block structure, no sharp edges, joints and welds</p>		<p>Stainless steel grid for load allocation, available upon request.</p>
<p>K</p>	<p>Overall heat transmission coefficient: K=0,35 W/m²K</p>		<p>Stainless steel interlocking kit to secure two stacked containers.</p>
	<p>USB datalogger available on request to record temperature data during transport.</p>		<p>EVlink module with Bluetooth interface available on request.</p>

TECHNICAL SPECIFICATIONS

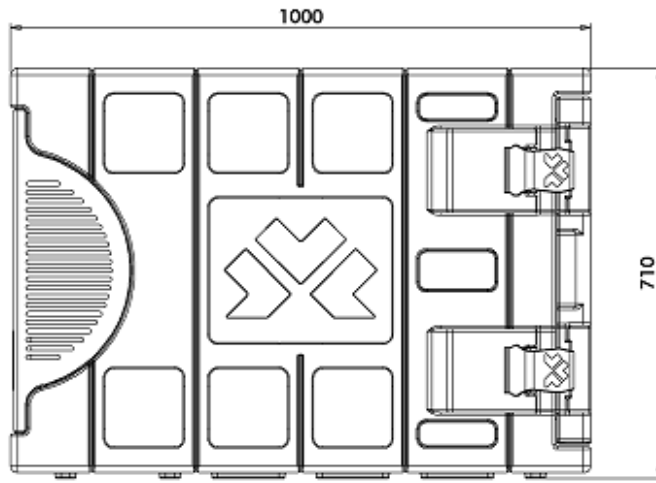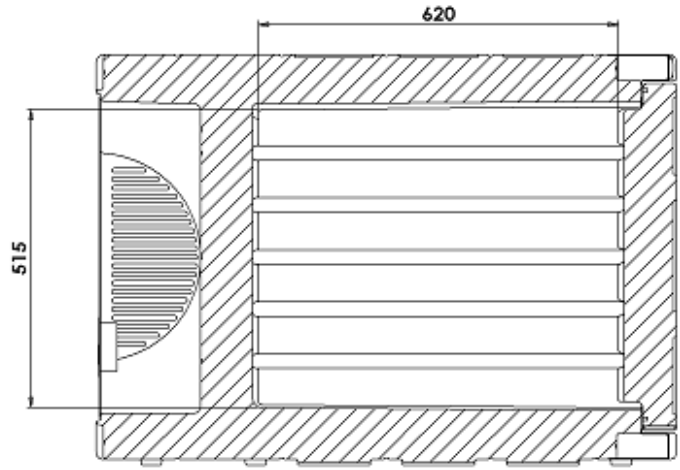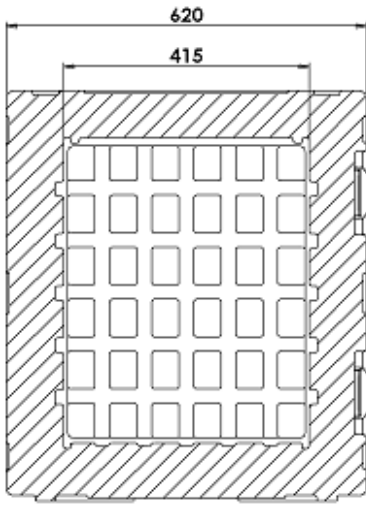

MODEL	Code	Nom. Absorption to 230Vac [A]	Fusible 230Vac [A]	External dim. [mm]	Internal dim. [mm]	Weight [kg]
AF VERSION						
Koala Green 140 AF 0°C +10°C	K140AFISDYM0	0,35	4A	620x1000xh710	415x620xh515	46
Koala Green 140 AF -18°C +10°C	K140AFISCYM0	1A	4A	620x1000xh710	415x620xh515	46
Koala Green 140 AF -25°C +10°C	K140AFISBYM0	1A	4A	620x1000xh710	415x620xh515	46
Koala Green 140 AF -30°C +10°C	K140AFISAYM0	1A	4A	620x1000xh710	415x620xh515	46
AFH VERSION (with heating kit)						
Koala Green 140 AFH 0°C +40°C	K140AFISDZM0	0,35	4A	620x1000xh710	415x620xh515	46
Koala Green 140 AFH -18°C +40°C	K140AFISCZM0	1A	4A	620x1000xh710	415x620xh515	46
Koala Green 140 AFH -25°C +40°C	K140AFISBZM0	1A	4A	620x1000xh710	415x620xh515	46
Koala Green 140 AFH -30°C +40°C	K140AFISAZM0	1A	4A	620x1000xh710	415x620xh515	46
BATTERY		Code	Weight [kg]			
Battery 65Ah		EPKIT65	9.5			
Battery 100Ah		EPKIT100	14.5			
ACCESSORIES		Code	External dim. [mm]	Internal dim. [mm]	Weight [kg]	
Stainless steel grid		AEA030	425x620xh12		2	
Trolley		AIB005			8	
Locking kit		RR1137				
Additional battery kit 65Ah		BATT65AH				
Additional battery kit 100Ah		BATT100AH				
Battery charger 10A		CHARGER10A				



Via Savigliano 34 - 12030 Monasterolo di Savigliano (CN) Italy
Tel. +39 0172812600 - info@melform.com

www.melform.com

Koala_140_Green_Rev0_En