Insulated container CARGO 1300 07/02/2025 rev2







80x120







Isothermal container for the transport of products at controlled temperatures

Brand: MELFORM

Country of origin: ITALY Customs code: 39231090

ATP Certificate

EUROPALLET internal dimensions

Compatible with food contact

Color: Grey/Blue

Capacity: 1350 litres.

Technology: rotational Warranty: 24 months

Fully recyclable at end of operating life.

MANUFACTURING MATERIALS


Polyethylene	internal and external walls of the container and door; suitable for food contact	Polyurethane	insulating material between the walls of the container and the door, free of CFCs and HCFCs
Silicone rubber	gasket	Polypropylene	hinges
Galvanized steel	metal feet, hinge rods, hinge rod connection plates, wheel support	Nylon	wheels
Stainless steel	operating handles, closing handle, internal door rod		

Model	Code	EAN code	External dimensions (mm)	Internal dimensions (mm)	Capacity (the)	Weight (Kg)
Cargo 1300 Basic	13019034	8022949200213	985x1405x1525	810x1210x1340	1350	148.5
Cargo 1300 with wheels	13019009	8022949143794	985x1405xh1695	810x1210xh1340	1350	153
Cargo 1300 with feet	13010003	8022949137212	985x1405xh1646	810x1210xh1340	1350	153



PRODUCT FEATURE	:S		
	Version with 6 galvanized steel feet h 120 mm		Version with wheels: 4 wheels with a diameter of 125 mm (2 fixed and 2 swivel, one with brake). Wheel support plate integrated into the container
N N	Euro pallet size drip collector		Double pin hinge system. Better door stability over time
	Door opens up to 270° with tongue door stop		Stainless steel locking handle with release button
	Handle designed for use with anti-tamper system.		Fresh, frozen and frozen plus eutectic plates to increase thermal maintenance performance over time
	Eutectic plate safety kit.		Thermometer inserted into the door (on request).
tempricts*	USB datalogger to record temperature data during transport	RFID	RFID systems for traceability
K	Overall heat transfer coefficient: K=0.35 W / m2K	°C	Guaranteed for use: from -30°C to +100°C



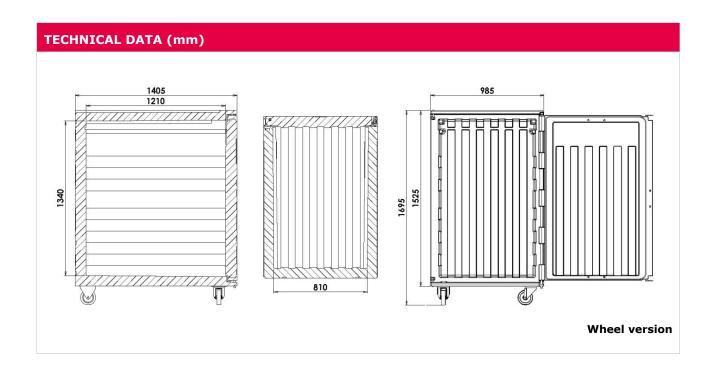

Weight (Kg)
h200 16
45 7.6
45 7.6
45 7.6

