

Insulated container for the transport of temperaturecontrolled products

- Brand: MELFORM
- Country of origin: ITALY
- Customs code: 39231090
- ATP Certificate
- External dimensions 80x100cm
- Compatible with food contact
- Color: grey/blue
- Capacity: 780 liters
- Technology: rotomoulding
- Warranty: 24 months
- Fully recyclable at the end of its operational life

MANUFACTURING MATERIALS

Polyethylene	inner and outer walls of container and door; suitable for food contact	Polyurethane	insulating material between the walls of the container and the door, free of CFC and HCFC
Silicone rubber	gasket	Nylon	wheels
Polypropylene	Hinges	Stainless steel	handling handles, closing handle, internal door rod
Galvanized steel	hinge rods, hinge rod connection plates, wheel support		

Model	Code	EAN code	Ext. dim. (mm)	Int. dim. (mm)	Capacity (I)	Weight (kg)
Basic	07809002	8022949123192	800x1000xh1780	610x810xh1570	780	108
With wheels	07800001	8022949058418	800x1000xh1950	610x810xh1570	780	112
With feet	07800009	8022949147990	800x1000xh1900	610x810xh1570	780	112
Fish transport version with wheels	07800013	8022949174200	800x1000xh1950	610x810xh1570	780	112




PRODUCT FEATURES	S		
a de la della d	Version on 4 wheels with a diameter of 125 mm (2 fixed and 2 swivel, one of which is equipped with a brake). Wheel support plate integrated in the container.		Alternatively, possibility of inserting 4 feet in galvanized steel h 120mm.
	3 housing seats of grids positioned at 385/785/1185mm from the bottom of the container.	5	Stainless steel rod with 2 hooks integrated inside the door.
	Stainless steel closing handle with release button.		Handle prepared for the use of a tamper-evident system.
	Fresh, frozen and frozen plus eutectic plates, to increase thermal maintenance performance over time		Internal temperature controllable thanks to the thermometer that can be inserted into the door (on request)
	Available version for transporting fish with expansion cap to allow the evacuation of the ice melt water of the fish		Easily removable door sealing gasket.
5 X 1	Door can be opened up to 270° with tongue door stopper		System of double pin hinges to improve stability of the door over time
	USB datalogger to record temperature data during transport	RFID	RFID systems for traceability
K	Overall heat transfer coefficient: K=0.31 W/m ² K	°C	Guaranteed for use: from -30° C to +100°C

ACCESSORIES FOR FISH TRANSPORT VERSION Stainless steel grid



TECHNICAL DATA (mm)

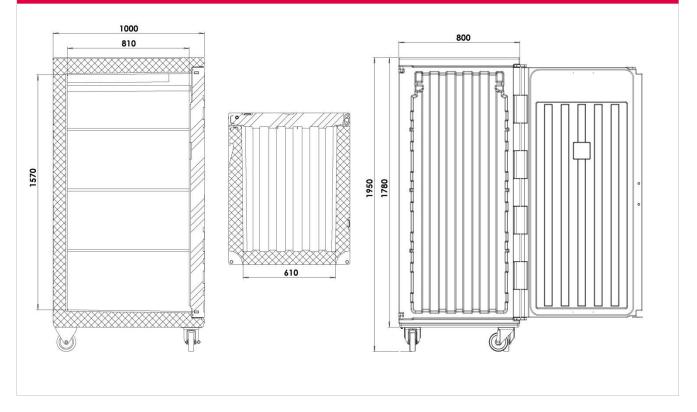

			-					 -	
A	•	CI.	-		_	• 1	124		- 1
	-	-	_	-	-	-			-

Code	Color	External dimensions (mm)	Weight (kg)
RRI141		A5	
AEA019		647x790xh16	4,3
AEA039			
PE500001	rose	540x325xh57	6,8
PE500002	blue	540x325xh57	6,8
PE500908	green	540x325xh57	6,8
AFG007		80x33xh14	
RRI223			
RRI180			
RRI165			
	RRI141 AEA019 AEA039 PE500001 PE500002 PE500908 AFG007 RRI223 RRI180	RRI141 AEA019 AEA039 PE500001 rose PE500002 blue PE500908 green AFG007 rose RRI223 RRI180	CodeColordimensions (mm)RRI141A5AEA019647x790xh16AEA039

