Insulated container CARGO 1000

07/02/2025 rev2

80x120













Insulated container for the transport of temperaturecontrolled products

Brand: MELFORM

Country of origin: ITALYCustoms code: 39231090

ATP Certificate

Compatible with food contact

Color: grey/blueCapacity: 1000 liters.

External dimensions EUROPALLET

Technology: rotomouldingWarranty: 24 months

Fully recyclable at the end of its operational life.


MANUFACTURING MATERIALS insulating material between inner and outer walls of container the walls of the container and **Polyethylene Polyurethane** and door; suitable for food contact the door, free of CFC and **HCFC** Silicone rubber Nylon gasket wheels handling handles, closing **Polypropylene** Hinges Stainless steel handle, internal door rod hinge rods, hinge rod connection **Galvanized steel** plates, wheel support

Model	Code	EAN code	Ext. dim. (mm)	Int. dim. (mm)	Capacity (I)	Weight (kg)
CARGO 1000 Basic	10009029EU	8022949136598	800x1200x1780	605x1015x1550	1000	125,5
Cargo 1000 with wheels	10000001EU	8022949106805	800x1200xh1940	605x1015xh1550	1000	130
Cargo 1000 with feet	10000010EU	8022949148102	800x1200xh1900	605x1015xh1550	1000	130
Cargo 1000 with pallet	10000002EU	8022949107833	800x1200xh1900	605x1015xh1550	1000	155
Cargo 1000 with wheels fish transport version	10000005EU	8022949116194	800x1200x1940	605x1015x1550	1000	130

PRODUCT FEATURES	5	
To the second se	Version on 4 wheels with a diameter of 125 mm (2 fixed and 2 swivel, one of which is equipped with a brake). Wheel support plate integrated in the container.	Version on pallet with galvanized frame with six feet of h 120 mm. Alternatively, possibility of inserting 4 feet in galvanized steel h 120mm.
	4 housing seats of grids positioned at 385/785/1185/1250mm from the bottom of the container	Intermediate grid with water collection tank.
	Stainless steel rod with 2 hooks integrated inside the door.	Handle prepared for the use of tamper-evident system.
	Fresh, frozen and frozen plus eutectic plates to increase thermal maintenance performance over time.	Safety retainer kit for eutectic plates.
	Specific version for transporting fish with expansion cap to allow the evacuation of the ice melt water of the fish.	Easily removable door sealing gasket.

PRODUCT FEATURES Internal temperature controllable thanks to the System of double pin hinges thermometer that can be to improved stability of the inserted into the door (on door over time. request). USB datalogger to record RFID systems for temperature data during traceability transport. Overall heat transfer Guaranteed for use: coefficient: K from -30°C to +100°C. K=0.33 W/m²K

ACCESSORIES FOR FISH TRANSPORT VERSION Drip tray to collect the melt water of the ice of the fish Bottom grid with breakwater system that limits water spillage when the Cargo is open Bottom stainless steel grid

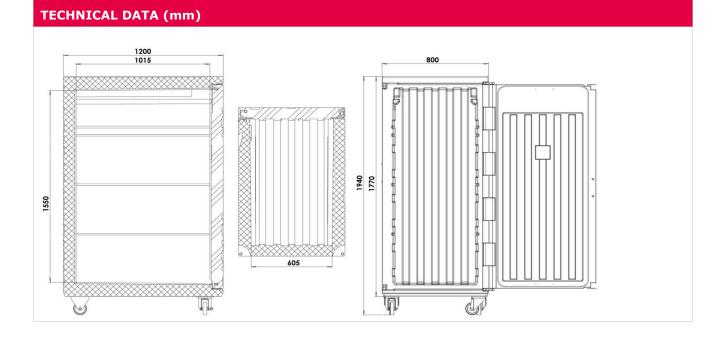

ACCESSORIES								
Model	Code	Color	External dimensions (mm)	Weight (kg)				
Card holder	RRI141		A5					
Stainless steel grid	AEA023		647x990xh16	5				
Intermediate stainless steel grid with water collection tank	AEA026		647x990xh56	11				
Folding stainless steel grid	AEA029		647x990xh25	6				
Eutectic plate Fresh +3°C - 2 x Cargo -	PE900001	rose	600x487xh50	10				
Eutectic plate Frozen – 21°C - 2 x Cargo -	PE900002	blue	600x487xh50	10				
Eutectic plate Frozen plus – 21°C - 2 x Cargo -	PE900908	green	600x487xh50	10				
USB Data Logger Range -30°C +70°C	AFG007							
Basic stainless steel grid (for fish transport version)	AEA027		600x975xh76	6,3				
Drip collector (for fish transport version)	3518		620x980xh120	7,5				
Floor/vehicle container fixing kit (for Basic version)	RRI223							
Eutectic plate retainer safety kit	RRI180							
Analog thermometer +40°C- 40°C	RRI165							

